



Click Here To View  
Item at

[www.GapPower.com](http://www.GapPower.com)

*Sales • Rentals  
Parts & Service*



## Expand the Capabilities of your Forklift


- Reach over or under obstructions to place heavy loads.
- Set equipment on the roof or elevated decks.
- Reach through narrow openings such as windows to set or pick up a load.
- Load and unload trucks easier and more safely.
- Reach into motor freight vans to load or unload materials and equipment.
- Load, move, and handle equipment in your equipment yard.
- Reach over scaffold to set stone or other heavy masonry units.
- Hang trusses and laminated wood beams.



### Specifications

- Designed for use on both straight-mast and extendable-reach type forklifts.
- Telescoping two section tubular steel boom.
- Manually telescopes from 7' 0" to 12' 0" - Pull spring-loaded pin to telescope - release pin and boom locks in desired position.
- Internal stop ensures telescoping section can not be accidentally pulled all the way out.
- Jib slides on the forks and is pinned behind the heel to secure it to the forklift.
- Universal fit (slip-on-the-forks) design permits use on most all forklifts.
- One swivel hooks are included.

MODEL 1360B	
Max. Load Cap.	6000 lbs.
Empty Weight	585 lbs.
Extends	7' 0" to 12' 0"
Vert. Center of Gravity	Centerline
Horiz. Center of Gravity:	
Fully Retracted	36 <sup>5</sup> / <sub>16</sub> "
Extended Midway	43 <sup>3</sup> / <sub>4</sub> "
Fully Extended	54 <sup>7</sup> / <sub>16</sub> "

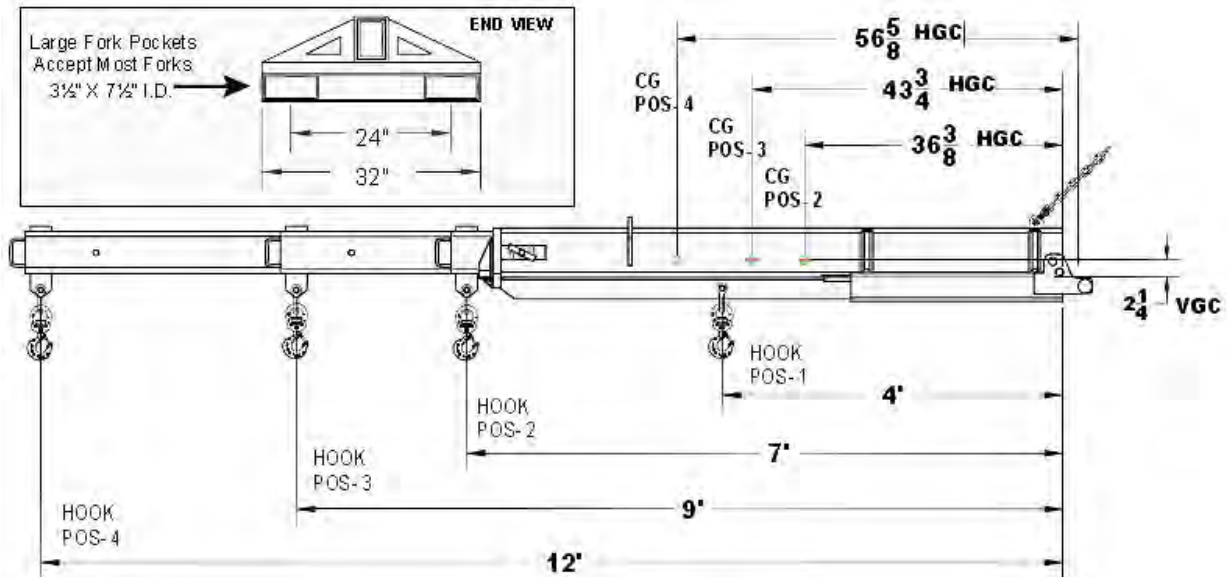

HOOK POSITION	4	3	2	1
DISTANCE	12' 0"	9' 0"	7' 0"	4' 0"
Maximum Load Capacity on a Single Hook	2,000 lbs.	3,000 lbs.	4,000 lbs.	6,000 lbs.

Fork Pocket Size: 30" long x 7½" x 3½" ID / Center to Center of Fork Pockets: 24" / Pocket Ends are open.