



## F70G FENCE 40-315

- Powerful cordless tool to countersink 40mm (1 9/16") fence staples in pressure treated lumber
- Good balance and reduced weight
- Rubber comfort grip ensures a non-slip handling
- Belt hook
- Special nose for fence application
- Tool-free depth of drive adjustment
- Top loading magazine holds 75 staples
- Single shot actuation
- Works with Fasco fuel cells
- Powerful NiMh battery
- Lights indicate battery charge

## TOOL TYPE




F70G FENCE 40-315

## TOOL CHARACTERISTICS

Height	Width	Length	Weight
373 mm	108 mm	351 mm	3.740 kg
14.70 inch	4.25 inch	13.82 inch	8.24 lbs

<b>Shot limit</b>	1000 Shots / Hour
<b>Speed</b>	2-3 Shots / Second
<b>Gas type</b>	Liquid petroleum gas
<b>Operating temperature</b>	-7 / 49° C   19 / 120° F

## FASTENER DATA

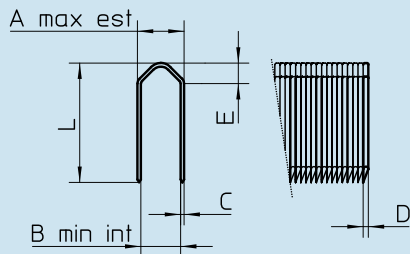

<b>A) Outside Crown</b>	12.80 mm	0.503 inch
<b>B) Inside Crown</b>	6.70 mm	0.264 inch
<b>CxD) Wire</b>	2.70 x 3.30 mm	0.106 x 0.130 inch
<b>L) Length</b>	25 - 40 mm	1 - 19/16 inch
<b>Magazine Capacity</b>	75 staples	
<b>Staple Type</b>	F40-315 Fence Staples	

## APPLICATIONS

- livestock batten fencing including hog and cattle panels
- electrified single wire with insulator for livestock and predator control
- light mesh and light woven fencing for horticulture and nursery
- plastic mesh barriers, pet enclosures and poultry fencing
- galvanized and poly-coated vineyard trellising guide wire
- single wire including high tensile, barbed and square wire
- plastic erosion control
- snow control fencing
- coaxial and fiber optic utility wire applications

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 97.2 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 100.2 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

5.26 m/s<sup>2</sup>

## ACTUATION & LOADING

<b>Actuation System</b>	Full Sequential Actuation
<b>Loading</b>	Top Loading

## BATTERY

<b>Input Charge</b>	220-240 VAC 50 Hz
<b>Charge Time</b>	2 hours
<b>Capacity</b>	1650 MaH
<b>Voltage</b>	6 VDC
<b>Shots/ Battery</b>	max. 5200
<b>Shots/ Fuel Cell</b>	max. 1200

## FASCO S.R.L. Italy

Via B. Buozzi 2

I - 40057 Cadriano di Granarolo (BO)

Tel. +39 051 / 60 181 | Fax +39 051 / 766 325

fasco@fasco-tools.com | www.fasco-tools.com

