



[Click Here To View](#)
[Item at](#)

www.GapPower.com

Sales • Rentals
Parts & Service

DustBuddie™

Dustless Technologies®

Installation Instruction

DUST COLLECTION SYSTEM FOR RIGHT ANGLE GRINDERS



Includes:


- 1 Clear polycarbonate shroud w/brackets and clamp
- 1 18" Flexible Hose
- 4 Washers
- 1 Removable clip
- 1 Releasable tie



1. Loosen band clamp.



2. Slip around grinder's collar.

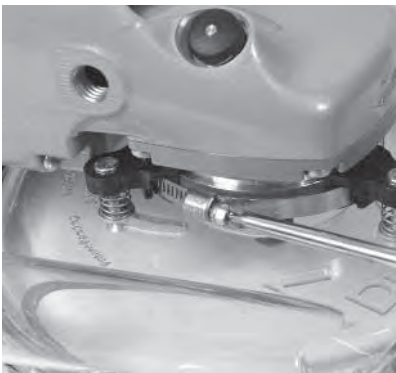

3. Center DustBuddie on the arbor and tighten band clamp.



4. Install grinding wheel.
(Use the washers provided to adjust wheel slightly below the brushes. You may also adjust the 3 screws if needed)




5. Insert hose to port. Secure other end of hose to the electric cord with releasable tie provided.

Go to www.dustlesstechnologies.com for more installation videos and tips

WARNING Always make sure grinder is UNPLUGGED when removing or attaching front nose clip. Before use, refer to your tool manual for warnings and instructions.

Instructions for Crack Chasing/Tuckpointing Application

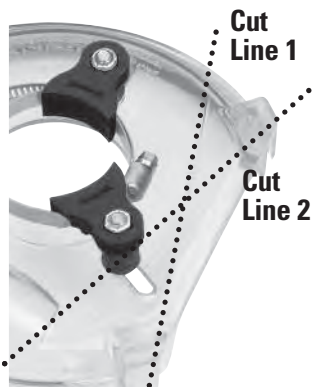

1. Tighten all 3 screws until bracket touches shroud.
2. Remove brushes. In the brush groove there is a plastic thin rib that will have to be cut out in order to snap coverplate in place.
3. Remove shroud clip, trim with band saw or cutting blade as follows:
 - a. Trim on "Cut line 1" if cutting blade is directly in front of grinder
 - b. Trim on "Cut line 2", if cutting blade is at a 45° angle
4. Install cutting wheel using washers provided to center the wheel
5. Snap cover plate in place (not included with grinding kit)

This product was inspected and packaged carefully before being shipped from the factory. If you should happen to need assistance during assembly or operation, call 1-800-568-3949 for our customer service department.

Dustless
TECHNOLOGIES
800.568.3949
dustlesstechnologies.com