

## FORESTRY MULCHERS FOR SKID STEERS

# UML/SSL/VT

### Forestry mulcher with fixed tooth rotor for skid steers.

Robust and compact, the UML/SSL is renowned for its ergonomic design that guarantees excellent visibility for the operator during various situations. Thanks to the diverter valve kit option, it can be utilized with

any brand of skid steer on the market. The VT version with automatic variable displacement hydraulic motor increases productivity by up to 50% and simultaneously reduces fuel consumption.




Sonic System



75-120 hp



Ø 8 in max

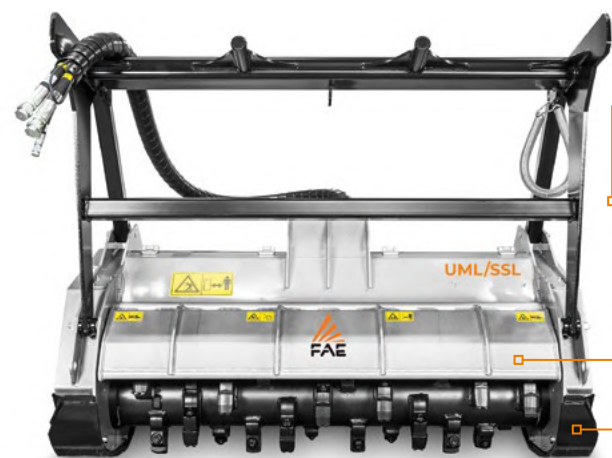

**Reinforced frames**  
Provides extra protection from the power of the carrier

**Enclosed door drive**  
revolutionary system of door opening/closing that prevents dirt from entering into the service areas of the machine



**Heavy duty adjustable skids**




**External pressure control Gauge**



**Poly-Chain® Carbon transmission belts**  
for solid power conversion and maximum productivity

**Double row protection chains**  
knocks down the material exiting out the back, increasing safety

## MAIN OPTIONS



**VT motor**  
adjustable the motor to obtain the maximum performance from any skid steer within specifications



**Diverter valve to control hood cylinders**  
to control the opening and closing of the hydraulic door



**Sonic System** is a new automatic intelligent system that manages the hydraulic transmission. It makes the mulching machine to perform at the maximum capacity in all conditions



**Roof mounted cooler**  
for working in hot climates

## STANDARD EQUIPMENT

110/60cc variable torque hydraulic piston motor (32-53 gpm)	Hydraulic front hood
Safety and anticavitation valve	Adjustable skids
Enclosed / anti dust machine body	Working pressure control gauge
Motor enclosed in the frame	Guard frame
Belt transmission	Dual row protection chains
Poly Chain® Belt Transmission	Welded counterblades
Hydraulic hoses	

## OPTIONS

Customized setting hydraulic motor	Multiple tooth options
Diverter valve (plug in and play)	Rotor Bite Limiter
Oil cooler kit	Sonic System

Case drain required

MODEL	UML/SSL/VT 125*	UML/SSL/VT 150*	UML/SSL/VT 175*
<b>Power (hp)</b>	75-120	75-120	75-120
<b>Flow rate (gal/min)</b>	32-53	32-53	32-53
<b>Pressure (PSI)</b>	2900-5000	2900-5000	2900-5000
<b>Working width (in)</b>	53	62	72
<b>Total width (in)</b>	65	74	83
<b>Weight (lbs)</b>	2646	2866	3086
<b>Rotor diameter (in)</b>	16.5	16.5	16.5
<b>Max shredding diameter (in)</b>	8	8	8
<b>No. teeth type C/3+C/3/SS</b>	26+2	32+2	36+2
<b>type I+C/3/SS</b>	36+2	42+2	50+2

Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.

\*Variable displacement hydraulic motor.

## ROTOR TYPE C



**C/3**  
(standard)



**C/3/HD**  
(option)



**BL BLADE**  
(option - requires adaptor)



**K/3**  
(option)

## ROTOR TYPE I



**I**  
(option)



**C/3/SS**  
(side scraper)