


XR1267 LOAD CHART OUTRIGGERS DOWN - SWING CARRIAGE

'S' RATING FOR FORKS STRAIGHT. 'T' RATING FOR FORKS ROTATED FROM STRAIGHT.

THE REAR AXLE MUST BE LOCKED AND THE OUTRIGGERS FIRMLY AGAINST THE GROUND.

4,000 LBS AT 24 IN MIN CAPACITY FORK (8,000 LBS PAIR).

LOAD RATINGS SHOWN ARE FOR VEHICLES EQUIPPED WITH FOAM FILLED TIRES ONLY.

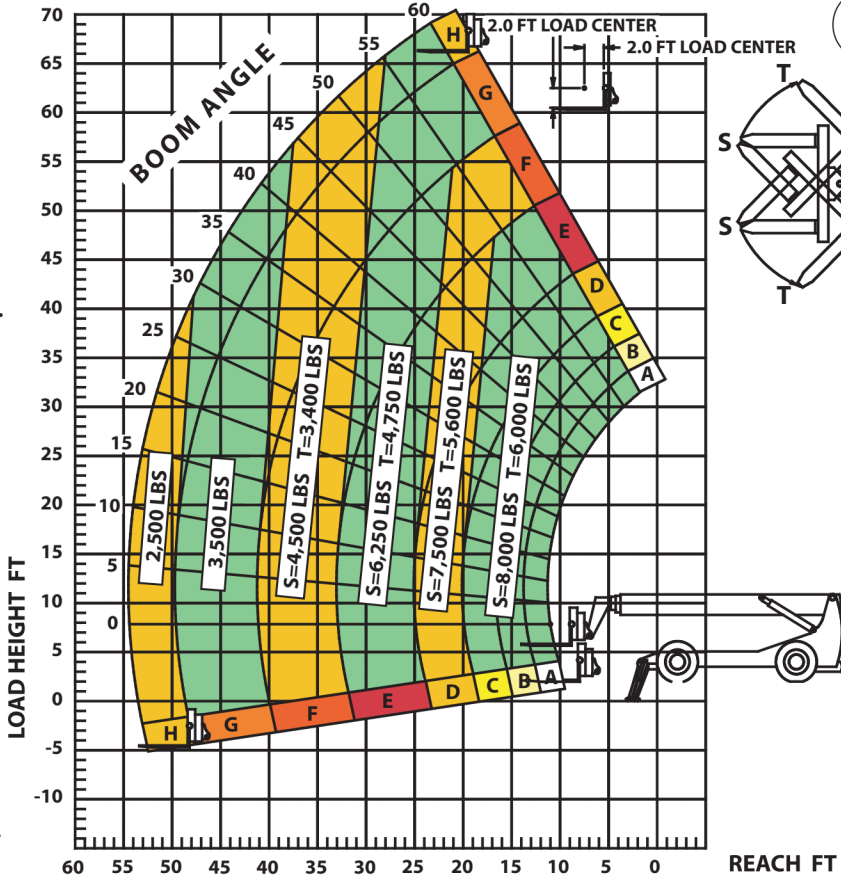

702-636-2969 • 800-497-1704

P/N 17055-000