



Click Here To View  
Item at

[www.GapPower.com](http://www.GapPower.com)


*Sales • Rentals  
Parts & Service*

# KUBOTA ULTRA-COMPACT EXCAVATOR

## SPECIFICATIONS

Model		K008-3	
Type of tracks		Rubber	
Engine	Model	Kubota D722-E4	
	Output (SAE J1995 gross) HP (kW)/rpm	10.3 (7.7) / 2050	
	Output (SAE J1349 net) HP (kW)/rpm	10.1 (7.5) / 2050	
Dimensions	Displacement cu.in. (cc)	44 (719)	
	Overall length ft.in. (mm)	9'0" (2750)	
	Overall height ft.in. (mm)	7'4" (2230)	
	Overall width ft.in. (mm)	2'10" (860) / 2'4" (700)	
Hydraulic system	Min. ground clearance in. (mm)	5.9" (150)	
	Pump capacity gpm. (l/min)	5.55 (21.0)	
	Auxiliary hydraulic flow gpm. (l/min)	5.55 (21.0)	
Max. breakout force	Bucket lbs. (kgf)	2200 (1000)	
	Arm lbs. (kgf)	1010 (460)	
Drive system	Travel speed mph (km/h)	1.2 / 2.5 (2.0 / 4.0)	
	Max. traction force lbs. (kgf)	1695 (770)	
	Tumbler distance ft.in. (mm)	2'11" (900)	
	Crawler length ft.in. (mm)	4'0" (1230)	
	Shoe width in. (mm)	7.1" (180)	
	Ground contact pressure psi (kgf/cm <sup>2</sup> )	3.55 (0.25)	
Swing system	Unit swing speed rpm	8.3	
	Boom swing angle	Left degree	55
Right degree		60	
Blade	Dimensions	Width in. (mm)	2'4" / 2'10" (700 / 860)
		Height in. (mm)	7.9" (200)
	Max. lift above ground in. (mm)	7.9" (200)	
Max. drop below ground in. (mm)		7.1" (180)	
Hydraulic oil (reservoir/system) gpm. (l/min)		3.30 / 4.49 (12.5 / 17.0)	
Fuel reservoir gpm. (l/min)		3.17 (12.0)	
Operating weight Including operator's weight 175 lbs. lbs. (kgf)		2200 (1000)	

## DIMENSIONS

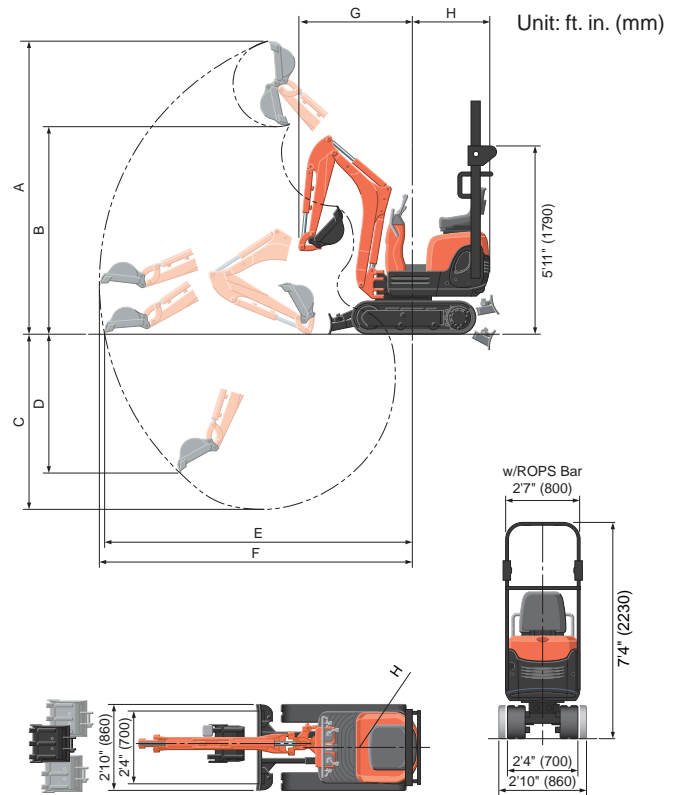

## LIFTING CAPACITY

LIFT POINT HEIGHT (ft)	LIFTING CAPACITY OVER-FRONT BLADE DOWN unit=1000 lbs			LIFTING CAPACITY OVER-FRONT BLADE UP unit=1000 lbs			LIFTING CAPACITY OVER-SIDE unit=1000 lbs			
	LIFT POINT RADIUS (ft)			LIFT POINT RADIUS (ft)			LIFT POINT RADIUS (ft)			
	4	6	8	4	6	8	4	6	8	
6	–	0.38	–	–	0.38	–	–	0.33	–	
4	–	0.44	0.39	–	0.39	0.24	–	0.32	0.20	
2	1.02	0.56	0.40	0.67	0.36	0.23	0.53	0.29	0.19	
GL	0	1.04	0.58	0.37	0.61	0.34	0.23	0.48	0.27	0.18

Machine with ROPS canopy and rubber crawler, without bucket



**Hydraulic Hammer**  
(Optional Attachment)



**Foldable ROPS**  
(Standard Attachment)

## WORKING RANGE

A	Max. digging height	ft.in. (mm)	9'5" (2870)	
B	Max. dumping height	ft.in. (mm)	6'8" (2035)	
C	Max. digging depth	ft.in. (mm)	5'8" (1715)	
D	Max. vertical digging depth	ft.in. (mm)	4'6" (1375)	
E	Max. digging radius @ ground	ft.in. (mm)	9'11" (3025)	
F	Max. digging radius	ft.in. (mm)	10'1" (3075)	
G	Min. turning radius	W/o swing	ft.in. (mm)	3'8" (1120)
		With swing	ft.in. (mm)	3'2" (955)
H	Min. tail turning radius	ft.in. (mm)	2'6" (750)	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purpose only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective structure (ROPS) and seat belt for almost all applications.

©2012 Kubota Corporation



## KUBOTA TRACTOR CORPORATION

Kubota Tractor Corporation, 3401 Del Amo Boulevard, Torrance CA 90503  
 Western Division: 1175 S. Guild Ave., Lodi, CA 95240 Tel (209) 334-9910  
 Central Division: 14855 FAA Boulevard, Fort Worth, TX 76155 Tel (817) 571-0900  
 Northern Division: 6300 at One Kubota Way, Groveport, OH 43125 Tel (614) 835-1100  
 Southeast Division: 1025 Northbrook Parkway, Suwanee, GA 30024 Tel (770) 995-8855

Visit our web site at: [www.kubota.com](http://www.kubota.com)

