



Click Here To View
Item at

www.GapPower.com

*Sales • Rentals
Parts & Service*

SPECIFICATIONS		M20	PL60
	Conforming Standard	ANSI A92.3	ANSI A92.3
	Platform Capacity	350 lbs (159 kg)	350 lbs (159 kg)
	Wind Rating		
	Power Source	AC or DC Drill	AC or DC Drill
	Rated Horizontal Force	52.5 lbs (234 N)	52.5 lbs (234 N)
	Machine Weight	278 lbs (126 kg)	310 lbs (141 kg)
	Swivel/Lockable Caster Diameter	5 in (127 mm)	127 mm
	Platform Size (L x W)	26 in x 30 in (660 mm x 762 mm)	26 in x 30 in (660 mm x 762 mm)
	Mast Section Weight	20.7 lbs (9.4 kg)	28.5 lbs (12.9 kg)
	Rear Outrigger Weight	7.8 lbs (3.6 kg)	9.3 lbs (4.2 kg)
	Front Outrigger Weight	10.3 lbs (4.7 kg)	10.6 lbs (4.8 kg)
	Flat Free Transport Wheels	12 in x 3.5 in (305 mm x 89 mm)	12 in x 3.5 in (305 mm x 89 mm)
	Drive	Worm Drive with Integrated Drive Gear & Brake	Worm Drive with Integrated Drive Gear & Brake
A	Stowed Length	53 in (1346 mm)	53.4 in (1356 mm)
B	Stowed Width	30 in (762 mm)	30 in (762 mm)
C	Stowed Height	69 in (1741 mm)	69 in (1741 mm)
D	Minimum Platform Height	12.9 in (329 mm)	12.9 in (329 mm)
E	Outrigger Footprint Width	52.1 in (1324 mm)	67.1 in (1705 mm)
F	Outrigger Footprint Length	58.9 (1496 mm)	64.4 (1635 mm)
G	Distance from Wall Side	11 in (281 mm)	18.5 in (471 mm)
H	Distance from Wall Front	12.3 in (314 mm)	10.3 in (261 mm)
I	Erected Mast Height	16.3 ft (5.0 m)	21.7 ft (6.60 m)
J	Maximum Platform Height	14.3 ft (4.34 m)	19.5 ft (5.94 m)
	Maximum Working Height*	20.3 ft (6.19 m)	25.5 ft (7.77 m)

*Maximum Platform Height plus 2 m.

Specifications subject to change without notice. Made in the USA


Portability Redefined.

You Tube See the PowerLift in action on YouTube.

RECHCRAFT
PowerLIFT

THE GO-ANYWHERE LIFT FOR ANYONE.
Unmatched simplicity, portability and performance at a remarkable price.

www.gopowerlift.com

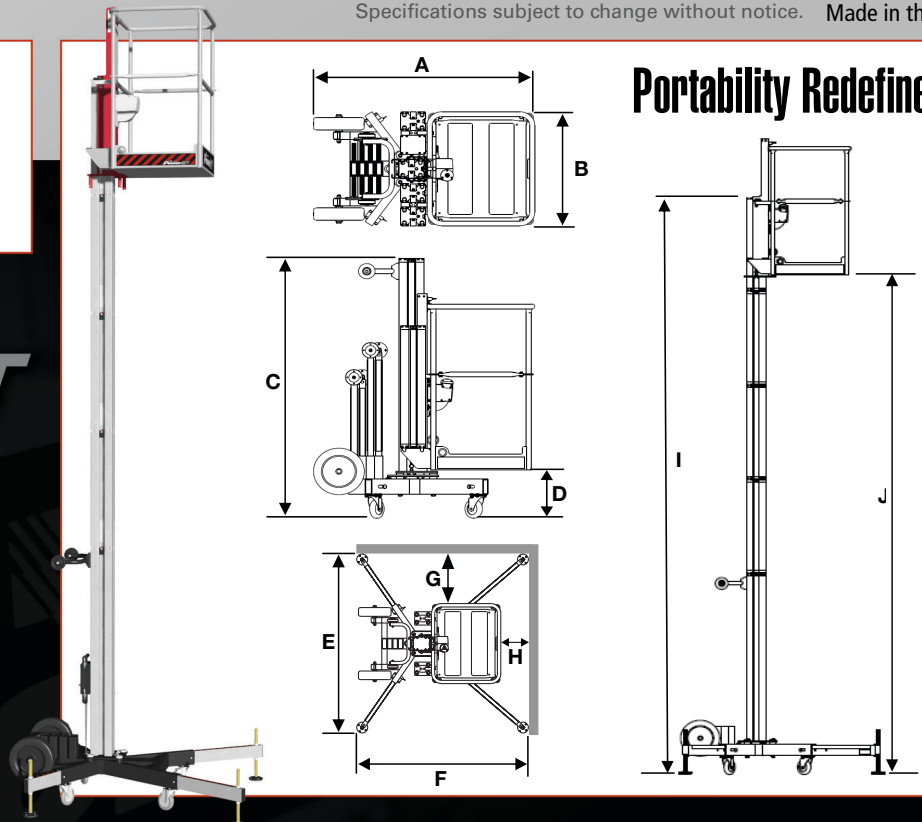


Portability Redefined.

OPTIONAL ACCESSORIES

PowerLift Hitch Hauler

- Load or unload PowerLift in under 15 seconds.
- Transport PowerLift by any vehicle with a 2" receiver hitch.
- Eliminate the need for trailer.
- Keep utilization of pickup box or cargo area.

The convenient Hitch Hauler eliminates the need for a pickup or trailer to transport the PowerLift. This option allows any vehicle with a type III receiver hitch to transport PowerLift in town or down the highway. Loads, unloads and secures in less than 15 seconds. No ropes, chains or straps required.

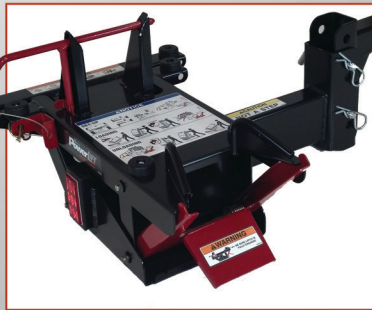

OPTIONAL NARROW PLATFORM

Our Optional Narrow Platform is 20 inches wide by 26 inches long by 42 inches tall and has been designed to fit T-bar ceiling and tight space applications. No Tools installation – Great rental option.



www.gopowerlift.com

P.O. Box 2426 • Fargo, North Dakota 58108

Sold By:

REECHCRAFT™

PowerLIFT

THE GO-ANYWHERE LIFT FOR ANYONE.

Unmatched simplicity, portability and performance at a remarkable price.