



GLIDESAFE™

EASY OPERATING EXTENSION LADDER

300lb

LOAD CAPACITY

TYPE IA DUTY RATING

Combined Weight of User and Materials



- Up to 50% Easier to Raise[†]
- Speed Controlled Lowering
- Jobsite Durability



FULL PERFORMANCE, HALF THE EFFORT



Lift assist technology reduces strain



Lowering assist controls descent



Dual locking system



GLIDESAFE™

EASY OPERATING EXTENSION LADDER

300lb

LOAD CAPACITY

TYPE IA DUTY RATING

Combined Weight of User and Materials



Lift & lowering assist technology

Exclusive Alflo® rung joint means Twist-Proof® performance




Auto Lock

Heavy duty locks

Two color rails

Dual-action feet

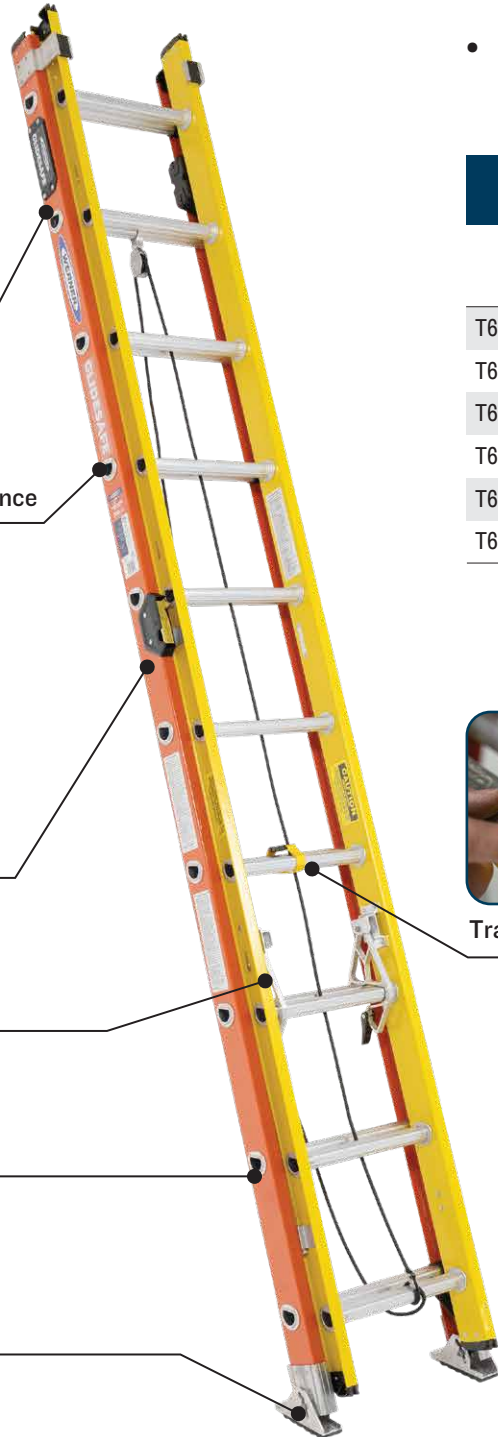

- Lift-assist technology makes it easier to extend with up to 50% less force[†], eliminating back and arm strain
- Built in lowering assist technology guarantees a smooth closing, preventing slamming and rope burns.
- The dual-locking system ensures the ladder won't extend while on the go, providing peace of mind.

SPECIFICATIONS

Model No.	Ladder Size	Ladder Length	Reach Height [‡]	Ladder Weight	Rung Type	Shipping Length	Shipping Width	Shipping Height
T6220-2GS	20 ft	17 ft	19 ft	44.5 lbs	Tri-Rung	120 in	19 in	6.9 in
T6224-2GS	24 ft	21 ft	23 ft	52.0 lbs	Tri-Rung	144 in	19 in	6.9 in
T6228-2GS	28 ft	25 ft	27 ft	59.5 lbs	Tri-Rung	168 in	19 in	6.9 in
T6232-2GS	32 ft	29 ft	31 ft	71.5 lbs	Tri-Rung	192 in	19 in	6.9 in
T6236-2GS	36 ft	32 ft	34 ft	84.5 lbs	Tri-Rung	216 in	19 in	6.9 in
T6240-2GS	40 ft	35 ft	37 ft	92.5 lbs	Tri-Rung	240 in	19 in	6.9 in



Transportation latch



[†] Percentage of assist can vary by ladder size, friction between siderails and variation on lift assist technology, compared to Werner D6200 300lbs fiberglass extension ladders

[‡] Assumes a 5ft 7in person with a vertical 12in reach