

MAX

PowerLite™

PowerLite™ 500PSI Compressor

AKHL1260E

Ultra Lightweight 35 lbs

DC-Brushless motor with an Inverter circuit allows start up in freezing temperatures and also functions in poor electric supply conditions down to 70 volts without tripping the circuit breaker.


Quiet Mode is suitable for facility maintenance jobs which require quiet operations like in hospitals or schools.

4 Air Outlets
2 outlets for High Pressure tools
2 outlets for 100psi tools



LED Control Panel alerts you of the following situations:
- Maintenance (1,000 hours operating time)
- Service required
- Low voltage (Under 70V)
- High voltage (Over 138V)
- High motor/ control circuit temperature

Easy Drain Lever

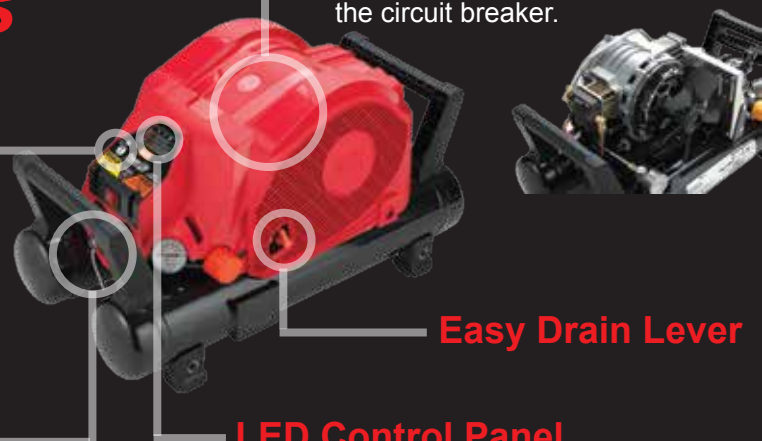

PowerLite™ 500PSI Compressor

AKHL1260EX

5.7 Gal. Large Capacity Air Tank

Suitable for rapid fire applications like floor decking.


Easy Detachable Tank

Easily convert to 2 tank model (AKHL1260E) by removing 4 screws.



CONTINUOUS FASTENING ABILITY*

*Number of nails was counted until the nail was no longer flush.
*45 sec. interval time was taken for replacing a coil of nail.

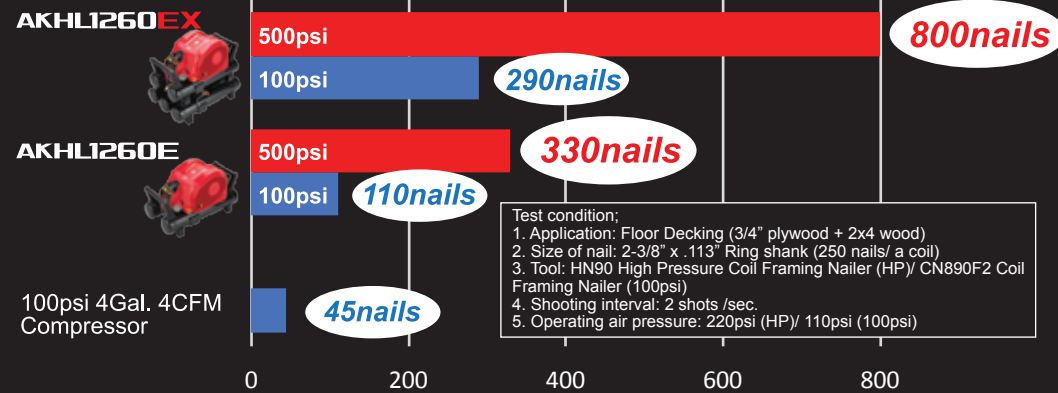

Test condition:
1. Application: Floor Decking (3/4" plywood + 2x4 wood)
2. Size of nail: 2-3/8" x .113" Ring shank (250 nails/ a coil)
3. Tool: HN90 High Pressure Coil Framing Nailer (HP)/ CN890F2 Coil Framing Nailer (100psi)
4. Shooting interval: 2 shots /sec.
5. Operating air pressure: 220psi (HP)/ 110psi (100psi)

500PSI PowerLite™ ACCESSORIES

Air Tank



AKTH13
(ONLY for AKHL1260E)
It connects to the AKHL1260E to increase the capacity of air volume.

Air Hose



KH100FT
(100 feet)
KH50FT
(50 feet)

Air Hose with wheel drum



SD630A2
(100 feet)

Connecting Air Hose



44-44K
Connects 2 compressors to double the air displacement

Splitter MFF



ARC-H1

COUPLING COMPRESSORS

COMBINATION	ITEM REQUIRED
AKHL1260E × AKHL1260E	44-44K Connecting Air Hose & TT05022 Air Chuck 44K
AKHL1260E × AKHL1250E	44-44K Connecting Air Hose & TT05022 Air Chuck 44K



Item#:	AKHL1260E	AKHL1260EX
Weight:	35.4 lbs	51.1 lbs
Dimensions(LxWxH):	23"x12-1/2"x13-1/4"	23"x15"x18-7/8"
Tank Capacity:	2.3 Gal.	5.7 Gal.
Horse Power:	2HP	
Power Supply:	115V±10% 60Hz±1%	
Rated Current:	12A	
Motor RPM:	2,900 (Normal mode)	1,600 (Quiet mode)
Air Displacement:	3.4 CFM @100PSI	2.6 CFM @300PSI