



Click Here To View  
Item at


[www.GapPower.com](http://www.GapPower.com)

*Sales • Rentals  
Parts & Service*

# OVERSEEDERS



The optional small seeds box allows two seeds to be metered at one time into the same seed tube for even distribution.

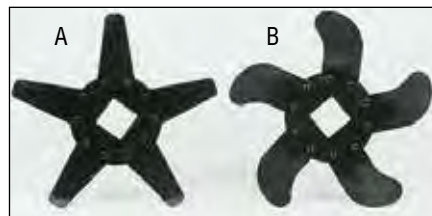

### Choice of Knives

(A) Straight, aggressive 3/16" thick knives prepare the soil by pulling up thatch, while (B) 10 gauge curved knives provide a minimum of surface disturbance.

## OS15 Series

48" - 25-60 HP; 72" - 30-60 HP

OS1548, OS1572

Cat. 1

<b>Working Width (broadcast) (cm)</b>	51" (129), 72" (183)
<b>Overall Width (with gauge wheels)</b>	78", 99"
<b>Overall Width (with rear roller drive)</b>	60", 81"
<b>Overall Length</b>	51.25"
<b>Weight - lb (kg) (gauge whl drive)</b>	1290 (585), 1645 (746)
<b>Knives — 5 per flange</b>	Standard or curved 115 on 2"; 80 on 3" Standard or curved 170 on 2"; 115 on 3"
<b>Rotor</b>	18" Diameter
<b>Productivity (3-1/2 mph)</b>	1.5 acres/hr (broadcast) 2 acres/hr (broadcast)
<b>Depth Adjustment</b>	0" - 1-1/2"
<b>Blade Spacing</b>	2" or 3"
<b>Gearbox</b>	540 RPM Cast Iron Housing
<b>Seedbox</b>	4 or 6 Bushel; Paddle Agitator
<b>Small Seedbox Capacity</b>	.95 or 1.36 Bushel
<b>Seed Cups and Drive</b>	7 or 10 Seed cups Powder Metal Flutes with Individual Cleanout Handles, RH Gauge Wheel Drive or Rear Roller Drive
<b>Packer Wheels</b>	12" Cast Iron with Corrugated Scraper
<b>Roller Chain</b>	#80 or 100, Adjustable, fully enclosed in oil bath
<b>Driveline</b>	Fully Shielded, Heavy-Duty, Slip clutch Standard
<b>Gauge Wheels</b>	18" x 8.50" x 8" Turf Tires -4 ply
<b>Slit-Seeder Weight - lb</b>	48: 2" Knife spacing = 38 48: 3" Knife spacing = 36 72: 2" Knife spacing = 56 72: 3" Knife spacing = 54

\*See dealer for complete warranty information.

Color Options:



www.landpride.com