

V20 MINI SKID CLOSED FRONT ROTARY BRUSH CUTTER

Available widths 42" & 48"

Cuts up to 3" diameter trees, and clears grass and brush for a consistent finished look.



CHOOSE MINI SKID MOUNT:


- TORO®/MINI UNIVERSAL
- BOBCAT®
- ASV®
- Universal skid steer quick tach mount not available.



Always wear proper PPE (Personal Protective Equipment). If operating in cab enclosure do not operate without a shatterproof cab.

3.0" CUT CAPACITY	42" & 48" CUT WIDTHS	11-18 GPM ONE MOTOR OPTION STANDARD FLOW ONLY	UP TO 150 LB FLYWHEEL WEIGHT	UP TO 720 LB OVERALL WEIGHT
-----------------------------	------------------------------------	--	---	---------------------------------------

DETAIL UNDER DECK

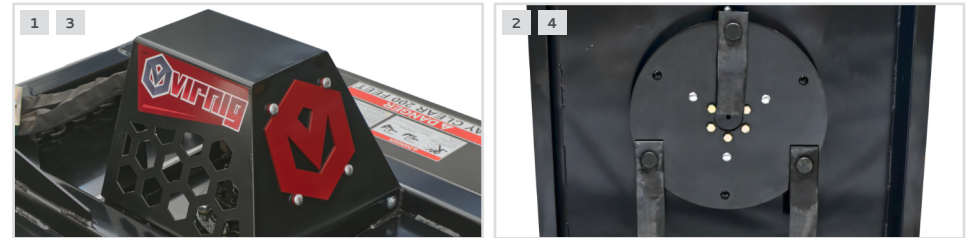

1. DIRECT DRIVE EATON® MOTOR WITH RELIEF VALVES
2. HYDRAULIC BRAKING STOPS FLYWHEEL IN LESS THAN 10 SECONDS
3. STANDARD MOTOR GUARD & SPINDLE GUARD
4. CIRCULAR FLYWHEEL WITH 3 UPDRAFT BLADES BOUNCES OFF STUMPS

MODEL	CBC42	CBC48
Cut Width (in.)	42.0	48.0
Overall Width (in.)	47.0	53.0
Overall Height (in.)		20.5
Overall Depth (in.)	58.0	64.0
Deck Height (in.)		6.5
Minimum Cut Height (in.)		2.0
Cutting Capacity, Diameter (in.)		3.0
Deck Thickness: Top / Side (in.)		0.19 / 0.19*
Recommended Flow Rate (GPM)		11 - 18
Approximate Weight with Mini Universal Mount (lbs)	620**	720**
Recommended Loader Capacity	Greater than 590 lbs	

*Material is Grade 50 Plate (50,000 PSI Minimum Yield Strength).
**ASV mount adds approximately 40 lbs and Bobcat mount adds 35 lbs to model weight.